



CITY OF TAMPA

Pam Iorio, Mayor

CONTRACT ADMINISTRATION DEPARTMENT

David L. Vaughn, AIA, Director

ADDENDUM NO. 2

DATE: AUGUST 4, 2008

Project: 08-C-00033; Norfolk Street and Packwood Avenue Stormwater Improvements

Bidders on the above referenced project are hereby notified that the following addendum is made to the Contract Documents. BIDS TO BE SUBMITTED SHALL CONFORM TO THIS NOTICE.

Item 1: Contract Items: Add, to page C-11, after Contract Item 9600, the following:

CONTRACT ITEM 10000 - RECONSTRUCTION OF SWALE/DITCH

The Contractor shall furnish equipment, labor, and materials to perform swale/ditch reconstruction as shown on the Plans specified and directed by the Engineer.

The Contractor may be required to fill existing ditches or swales per designed elevations. The Contractor shall use excavated, suitable material from storm sewer construction for fill.

The work includes all clearing, care of structures and adjacent property, placing, maintenance, and removal of shoring, sheeting, and bracing, removal of water, backfilling, disposal of surplus excavated material, temporary restoration of street surfaces, digging test pits to locate existing house laterals when requested by the Engineer, and other work appurtenant to the swale/ditch reconstruction as specified, directed, and shown on the plans.

The quantity of Swale/Ditch Reconstruction, in linear feet, to be measured for payment will be the total reconstruction, as shown on the Plans and directed and approved by the Engineer.

Payment for Swale/Ditch Reconstruction will be made at the Contract Item Unit Price per linear feet of reconstruction.

Item 2: Specific Provisions: Add, to page SP-24, the following:

SP-134 Pipe Bedding


All pipe shall include Type C bedding as shown in the attached Bedding Details.

Item 3: Specific Provisions: Insert, after page SP-24, the attached Bedding Details.

This addendum shall be included in and attached to the inside cover of the Contract Documents by and upon which bids are submitted.

All other provisions of the Contract Documents and Specifications not in conflict with this Addendum shall remain in full force and effect.

For questions concerning the above referenced project, please fax to 813/274-8080.

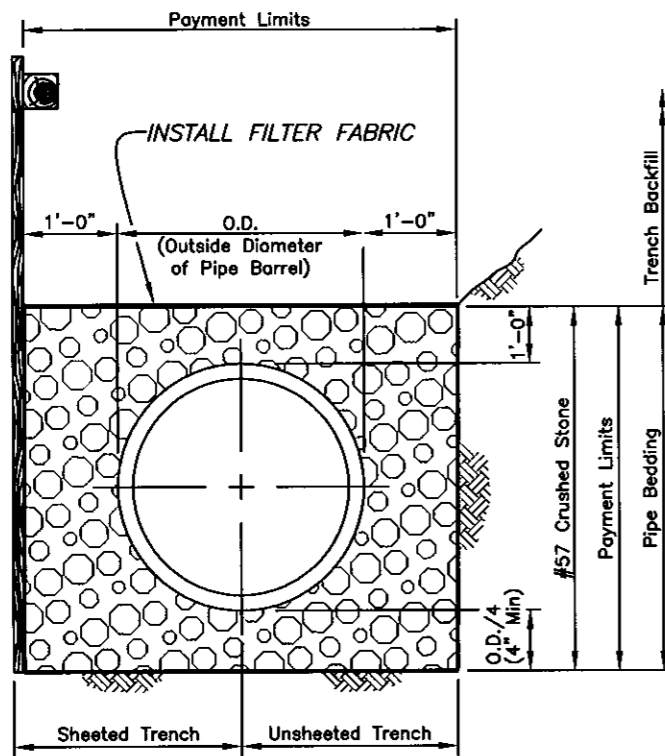

Jim Greiner, P.E., Contract Manager
Contract Administration Department

306 E. Jackson Street, 4N • Tampa, Florida 33602 • (813) 274-8456 • FAX: (813) 274-8080

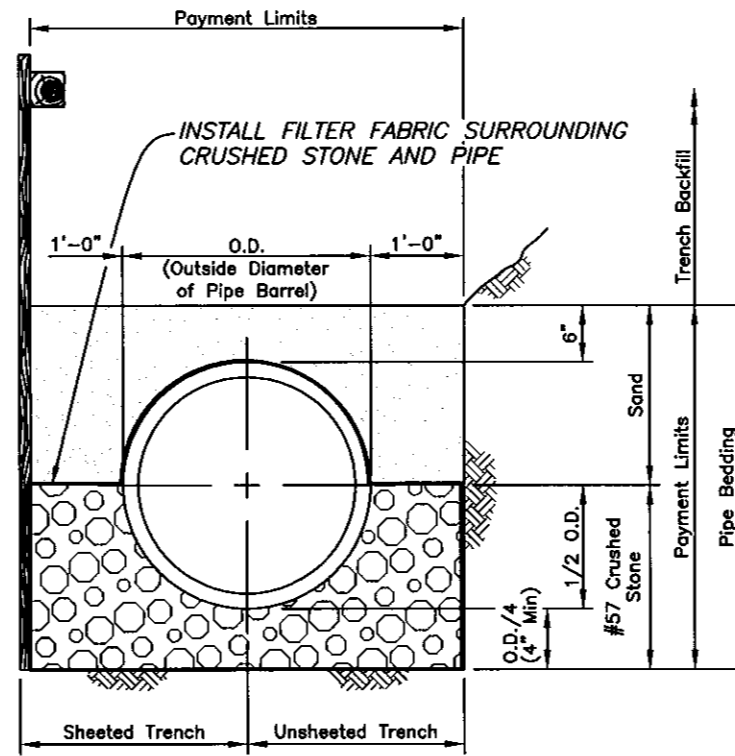

www.tampagov.net

Notes:

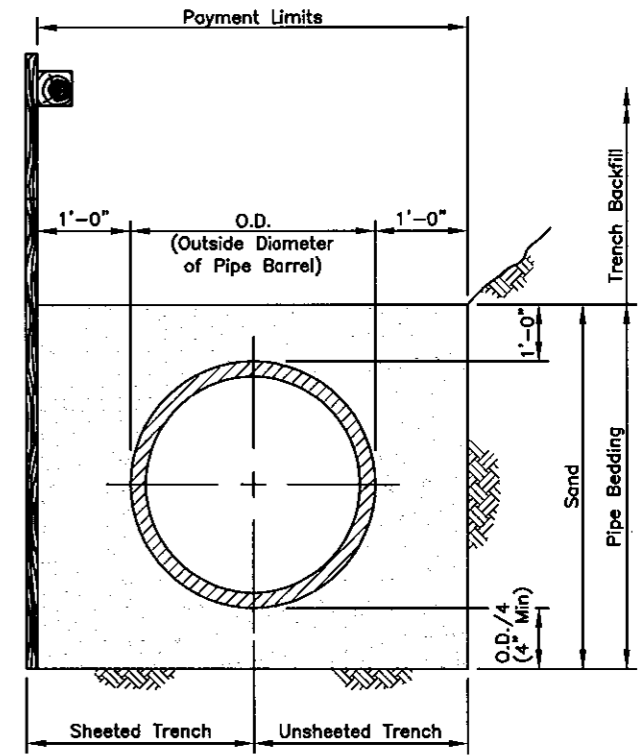
1. All types of pipe bedding shall extend to undisturbed earth at sides and bottom of the trench.
2. Sand and crushed stone pipe bedding shall be placed and compacted in accordance with specifications.
3. Bedding materials shall meet project specifications for Class B and Class C Bedding.
4. Filter fabric shall meet FDOT Standard Specification 441-2.3.



CLASS B-I BEDDING



CLASS B BEDDING



CLASS C BEDDING

Misc. Details

No.	DATE	REVISIONS	No.	DATE	REVISIONS
3			6		
2			5		
1	12/09/04	NEW SHEET	4		

DES: STORM
DRN: STORM
CKD:
DATE:

CITY of TAMPA
STORMWATER DEPARTMENT

BEDDING DETAILS

W.O.
SHEET
29
OF 30