


HILLSBOROUGH

Figure 1609B

Ultimate Design Wind Speeds Risk Category III & IV Buildings and Structures

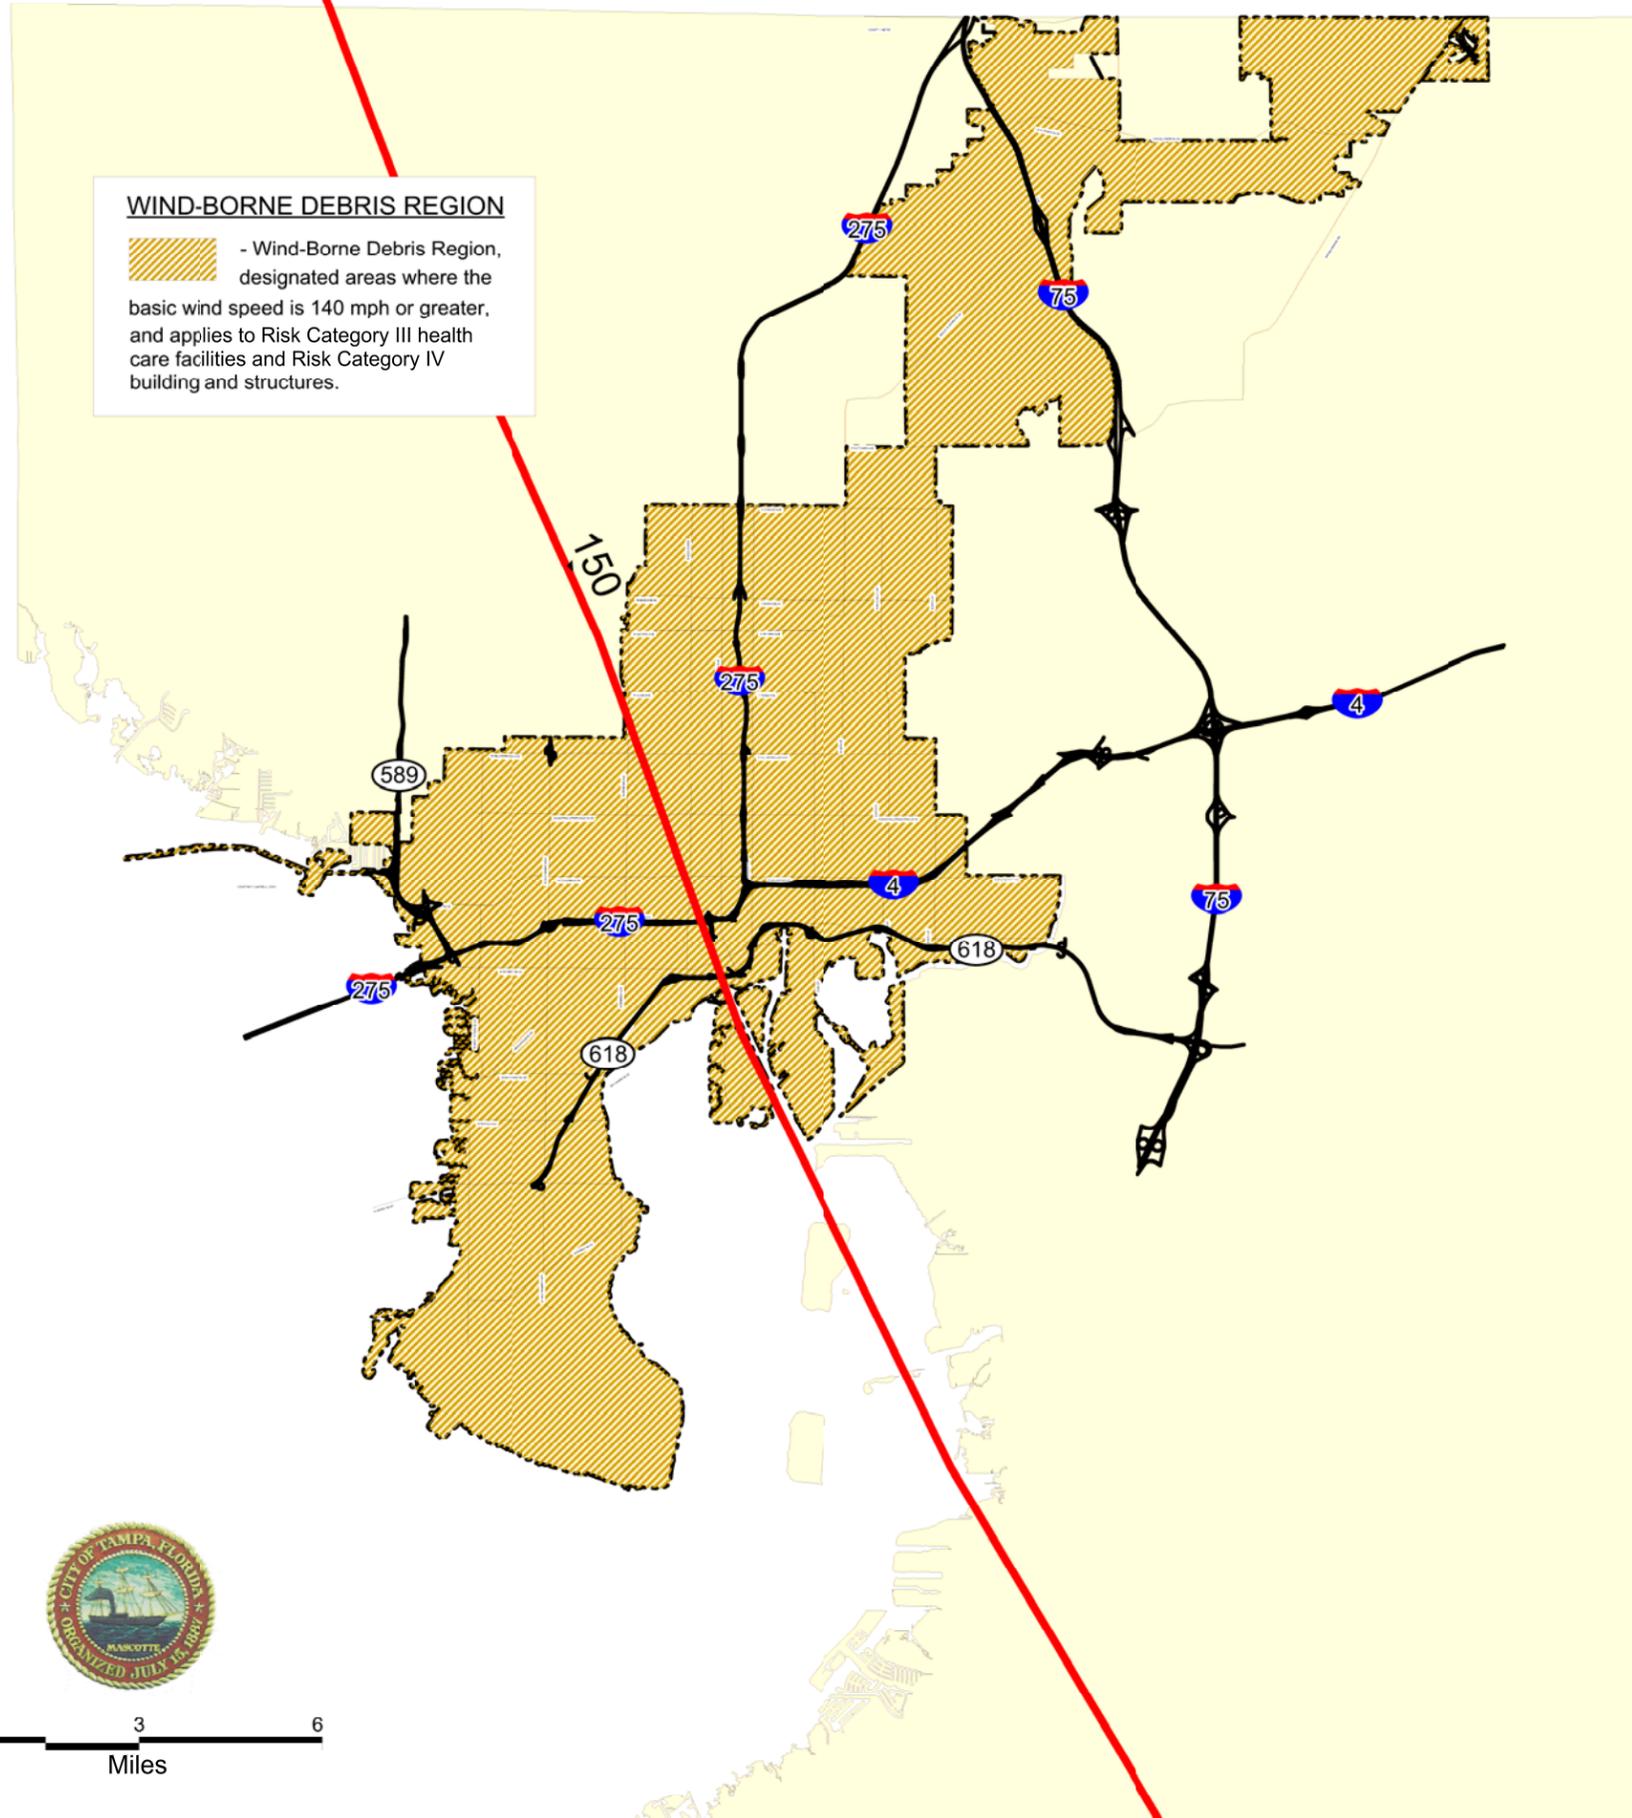

BASIC WIND SPEED. The basic wind speed in miles per hour, for the development of wind loads, shall be determined from Figure 1609. The exact location of wind speed lines shall be established by local ordinance using recognized physical landmarks such as major roads, canals, rivers and lake shores whenever possible.

WIND-BORNE DEBRIS REGION. Areas within hurricane-prone regions located:


1. Within 1 mile (1.61 km) of the coastal mean high water line where the ultimate design wind speed V_{ult} is 130 mph (48 m/s) or greater; or
2. In areas where the ultimate design wind speed V_{ult} is 140 mph (53 m/s) or greater.

For Risk Category II buildings and structures and Risk Category III buildings and structures, except health care facilities, the windborne debris region shall be based on Figure 1609A. For Risk Category IV buildings and structures and Risk Category III health care facilities, the windborne debris region shall be based on Figure 1609B.

Notes:

1. See Table 1604.5 for Risk Category Designations.
2. For more information, go to the following web site: <https://www.atcouncil.org/windspeed/>

Figure 1609B Ultimate Design Wind Speeds,
for Risk Category III and IV Buildings and Other Structures

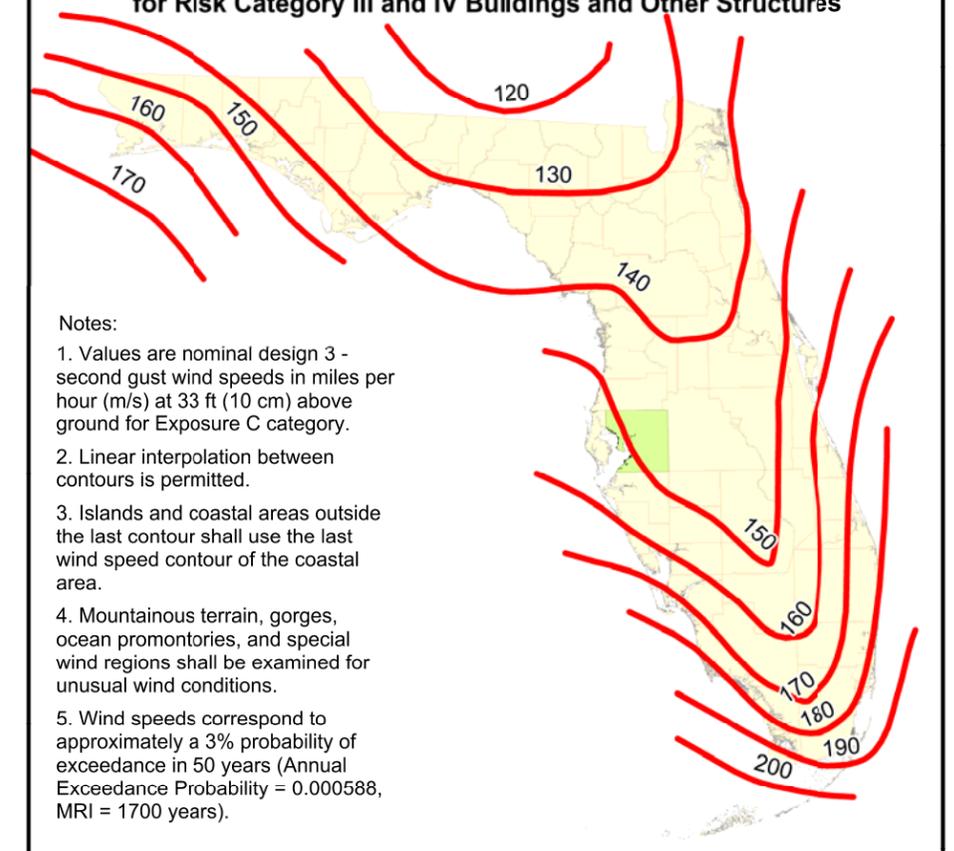

Map reproduced by City of Tampa, Land Development Coordination Division, based on the following sources: Florida Department of Community Affairs, Codes and Standards Division; Applied Research Associates, Inc.; Florida Geographic Data Library