



Davis Blvd Complete Streets


Complete Street Project | City Project No: 1001590



Project Location

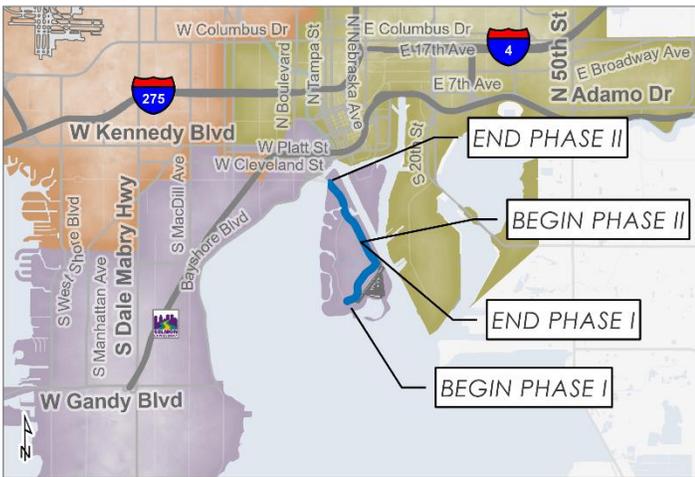

Overview Map

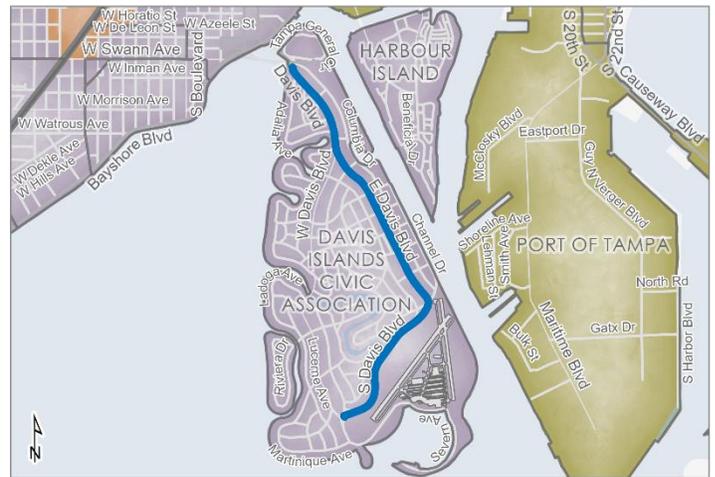

Detail Map

Project Description

This project provides for resurfacing, complete streets and safety improvements for S. Davis Blvd from Severn Ave to E. Davis Blvd, E. Davis Blvd from S. Davis Blvd to Davis Blvd, and Davis Blvd from E. Davis Blvd to the Davis Islands Bridge. This project incorporates elements from the Davis Islands Community Plan that was developed by Davis Islands Plan Stewardship Committee.

This project will resurface the road and construct complete streets elements to:

- improve the overall pavement condition and fix existing drainage issues or ponding
- upgrade curb ramps to comply with current ADA standards
- calm traffic and provide enhanced multimodal connectivity

The project will entail two phases.

- Phase I consists of pavement resurfacing, narrowing widths of travel lanes, providing marked parking spaces and bicycle lanes and lowering the posted speed to 30 mph from the roundabout located off Severn Ave to Chesapeake Ave on E Davis Blvd. This phase will be completed as part of the Davis Islands Water Main Replacement Project (19-C-57).
- Phase II, from Chesapeake Ave to the Davis Islands Bridge will consist of pavement resurfacing, narrowing widths of travel lanes, relocating the crosswalk near Adalia Ave further south; providing a dedicated left turn lane into the 17 Davis garage, installing RRFB-enhanced

Mobility Department – Transportation Engineering Services
Davis Blvd Complete Streets Resurfacing

crosswalks with median refuge areas at Arbor Place, south of the apex of Davis/E Davis Blvd, and Bosphorous Ave; maintaining on street parking, and providing a bicycle lane from Bering St to the south. Phase II also includes raised intersections at Barbados Ave, Biscayne Ave and Chesapeake Ave, and a reduced posted speed of 15 mph within the Davis Islands Village. Phase II will be constructed under a separate Citywide Contract upon completion of the water main replacement project.

For more information please contact the City's Project Manager, Robert Hatton, at Robert.Hatton@tampagov.net or (813) 274-1289.

Additional Project Information

For additional information please visit the project website:

https://www.tampagov.net/tss-transportation/info/projects/davis_islands_resurfacing

Project Costs and Schedule

Phase	Firm	Cost	Funding Source	Schedule Start	Schedule Finish
Concept Development	DKS	\$17,300	LOGT	June 2016	February 2017
Survey	Southeastern	\$49,900	LOGT	February 2018	October 2018
Design (Resurfacing)	GPI	\$99,000	LOGT	Summer 2018	Spring 2020
Design	GHD	\$148,600	LOGT	Summer 2018	Spring 2020
Construction, Phase I	Ric-Man Construction Florida, Inc.	\$500,000	Multi-Modal and Street Resurfacing	June 2020	March 2021
Construction, Phase II	TBD	\$1.5 Million	Multi-Modal and Street Resurfacing	March 2021	TBD