43rd Street Outfall PH III

Regional Drainage Improvement - FY2017, District 5

Estimated cost: $5M (City Share $2.5M)

- **JUSTIFICATION:**
  The project provides a new secondary outfall to convey runoff from the Phase I regional pond to the 43rd Street Outfall. Phase II improvements provide additional flood relief for properties and roadways that are severely impacted.

- **PROJECT DESCRIPTION:**
  The project consists of the construction of a 48-inch RCP pipe from the Phase I regional stormwater pond to the 43rd Street Outfall just upstream of McKay Bay. Additionally, a culvert upgrade will be constructed at the terminus of the 43rd Street ditch to reduce flooding on adjacent properties.
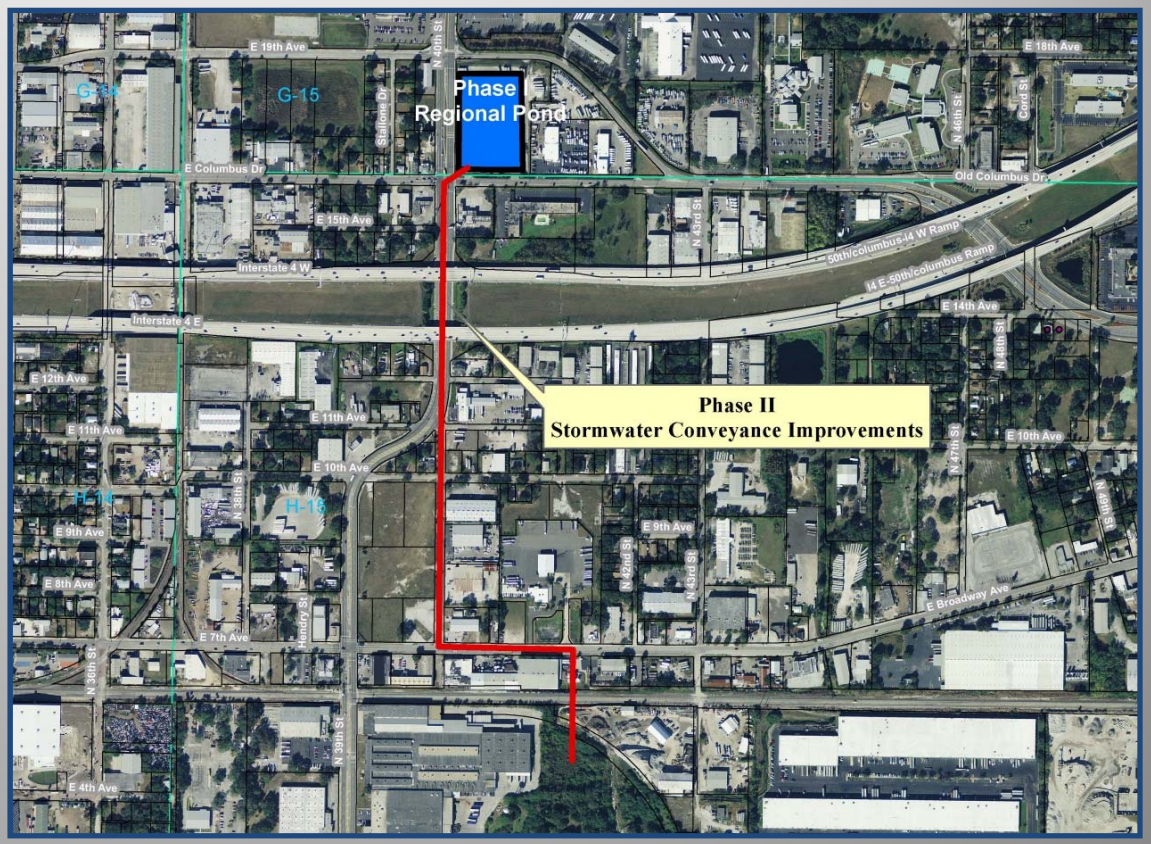
PROPOSED PROJECT MAP